


Industrial Touchscreen Monitor

The ADB series of industrial touchscreen monitor adopts industrial-grade capacitive touch controller, offering high-precision touch and strong anti-interference capabilities. Equipped with high-brightness TFT, they provide excellent outdoor visibility. The full-metal housing design ensures robustness and durability, with an IP65 front-panel dustproof and waterproof rating, enabling adaptation to various harsh environments and ensuring long-term stable operation. Widely used in commercial self-service terminals, industrial automation control, medical equipment, and other fields, they significantly enhance human-machine interaction and operational efficiency.

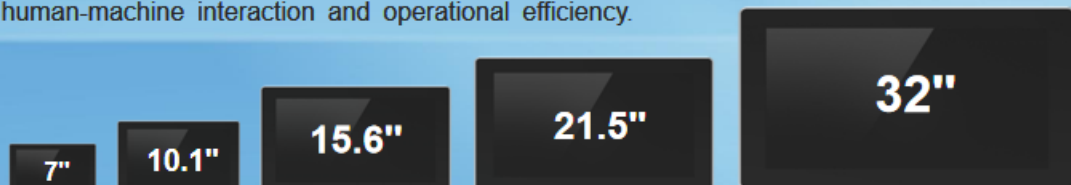

Product Features

Aluminum Frame




Capacitive Touch Panel



VESA Mount or Embedded Installation



Fanless Cooling

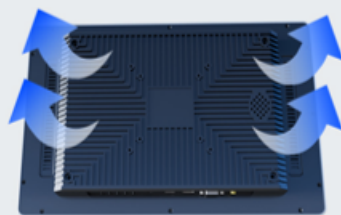

High-brightness Backlight
Sunlight-readable

1000 nit



Standard Interface



TOUCH
POWER DISPLAY



Specifications

Item		Specifications				
Module Number		ADB-D266070CS-A1-S	ADB-D266101CS-A2-S	ADB-D251156CS-A0-S	ADB-D266215CS-A1-S	ADB-D266320CS-A0-S
LCD	Size	7"	10.1"	15.6"	21.5"	32"
	Resolution	1024*600	1280*800	1920*1080		
	Viewing Angle	Free				
	Luminance	1000 cd/m2 （Typ.）				
	Life-Time	30,000 Hrs				
CTP	Touch Type	Capacitive Touch				
	Interface	USB				
	Touch Number	Multiple touch（Up to 10 Points）				
	Transmittance	≥ 85%				
	Surface Hardness	≥ 6H				
I/O	Video	HDMI Type-A（HDMI1.4）				
		VGA（DB-15 Connector）				
	Audio	EARPHONE OUT（3.5mm）				
PWR	Input Type	JACK DC044B（for 5.5mm×2.1mm DC barrel plug）				
	Voltage	DC 12V			DC 24 V	
	Consumption	7.3 W	10 W	15 W	42W	73 W
Phys. Params.	Dimensions（mm）	210.00 ×140.40	260.40×177.40	390.00×240.00	532.00×324.00	752.00×450.00
	Net Weight	0.78Kg	1.08kg	3.41Kg	5.06Kg	13.09Kg
Env. Params.	Operating Temperature	-20 ～ 70° C				
	Storage Temperature	-30 ～ 80° C				
	Humidity	10 ～ 95% RH（Non-condensing）				

External Interface

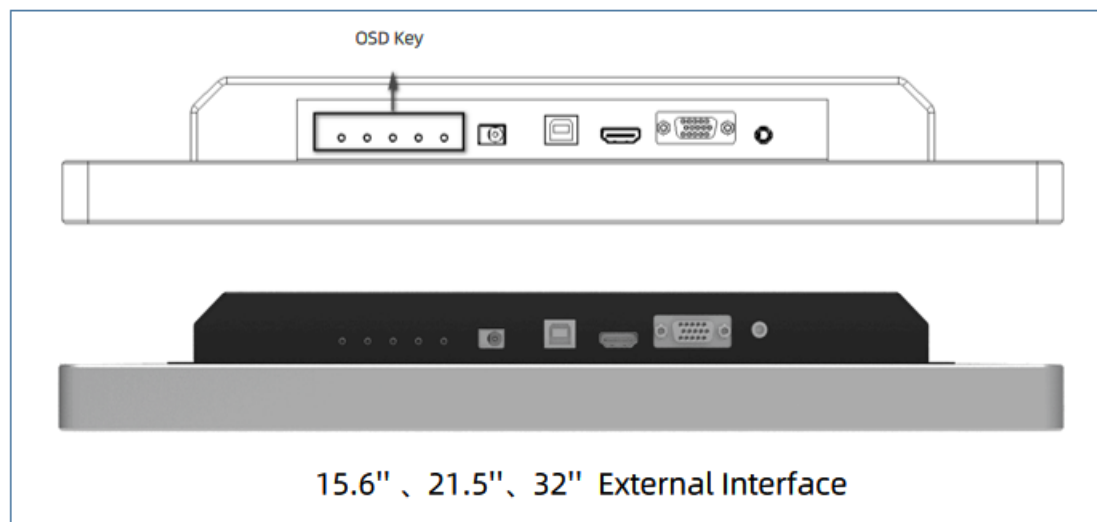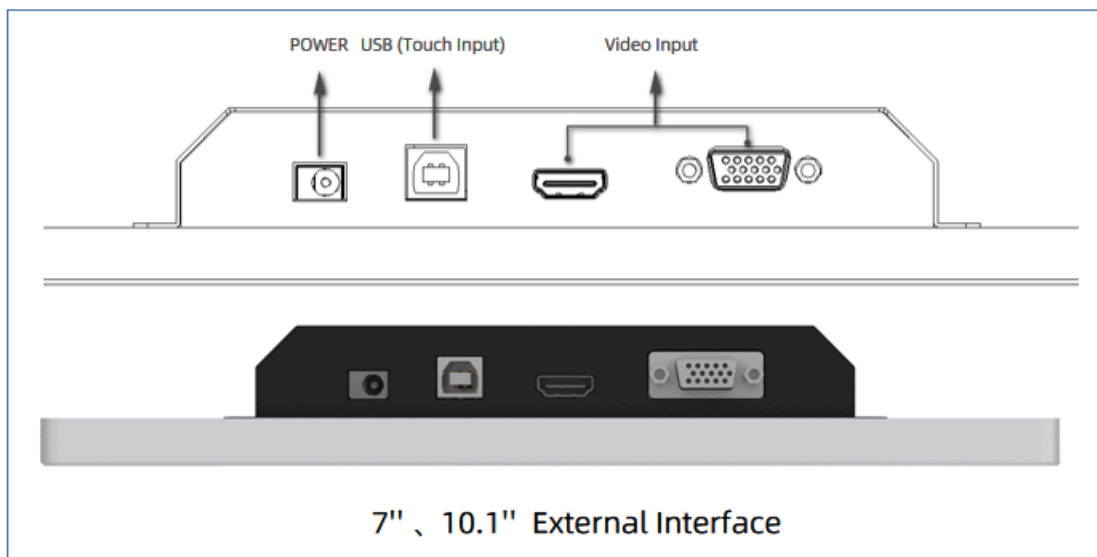

Optional Accessories

Part Number	Description
14040301000018A	HDMI Cable, Type-A, Length 1.0M
14100000000162A	VGA Cable, Length 1.5M
14040602000021A	USB2.0, Type-A to Type-B, Length 1.0M
	Power Adapter 12V / 3.5A
	Power Adapter 24V / 5A